

## 16-port unmanaged Ethernet switches



### Features and Benefits

- 10/100BaseT(X) (RJ45 connector), 100BaseFX (multi/single-mode, SC or ST connector)
- QoS supported to process critical data in heavy traffic
- Relay output warning for power failure and port break alarm
- IP30-rated metal housing
- Redundant dual 12/24/48 VDC power inputs
- -40 to 75°C operating temperature range (-T model)

### Certifications



## Introduction

The EDS-2016-ML Series of industrial Ethernet switches have up to 16 10/100M copper ports and two optical fiber ports with SC/ST connector type options, which are ideal for applications that require flexible industrial Ethernet connections. Moreover, to provide greater versatility for use with applications from different industries, the EDS-2016-ML Series also allows users to enable or disable the Quality of Service (QoS) function, broadcast storm protection, and the port break alarm function with DIP switches on the outer panel.

In addition to its compact size, the EDS-2016-ML Series features 12/24/48 VDC redundant power inputs, DIN-rail mounting, high-level EMI/EMC capability, and an operating temperature range of -10 to 60°C with -40 to 75°C wide temperature models available. The EDS-2016-ML Series has also passed a 100% burn-in test to ensure it will function reliably in the field.

## Specifications

### Ethernet Interface

|                                            |                                                                                                                                                                                                                                                                                  |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10/100BaseT(X) Ports (RJ45 connector)      | EDS-2016-ML: 16<br>EDS-2016-ML-T: 16<br>EDS-2016-ML-MM-SC: 14<br>EDS-2016-ML-MM-SC-T: 14<br>EDS-2016-ML-MM-ST: 14<br>EDS-2016-ML-MM-ST-T: 14<br>EDS-2016-ML-SS-SC: 14<br>EDS-2016-ML-SS-SC-T: 14<br>Auto negotiation speed<br>Full/Half duplex mode<br>Auto MDI/MDI-X connection |
| 100BaseFX Ports (multi-mode SC connector)  | EDS-2016-ML-MM-SC: 2<br>EDS-2016-ML-MM-SC-T: 2                                                                                                                                                                                                                                   |
| 100BaseFX Ports (multi-mode ST connector)  | EDS-2016-ML-MM-ST: 2<br>EDS-2016-ML-MM-ST-T: 2                                                                                                                                                                                                                                   |
| 100BaseFX Ports (single-mode SC connector) | EDS-2016-ML-SS-SC: 2<br>EDS-2016-ML-SS-SC-T: 2                                                                                                                                                                                                                                   |

| Standards                                                                                                                                                                                                                                                                                                         | IEEE 802.3 for 10BaseT<br>IEEE 802.3u for 100BaseT(X)<br>IEEE 802.3x for flow control<br>IEEE 802.1p for Class of Service                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |              |       |                        |                        |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|------------------------|------------------------|--|--|-----------|--|--|------------|--|------------------------|------------------------|------------------|-----|-----------|-------|-------|--------------|------------------|--|------|------|-------|-------|------------|--------------|------|--|------|------|---------------|--------------|--|--------------|--------------|---------------|--------------|--|--------------|--------------|---------------|----------------|------------|--|---------|---------|----------------|-----------|--|-----------|-----------|------------------|----|--|----|----|-------------------------|---|--|---|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|
| Optical Fiber                                                                                                                                                                                                                                                                                                     | <table><tr><th colspan="2" rowspan="2"></th><th colspan="3">100BaseFX</th></tr><tr><th colspan="2">Multi-Mode</th><th>Single-Mode<br/>(40 km)</th><th>Single-Mode<br/>(80 km)</th></tr><tr><th rowspan="2">Fiber Cable Type</th><th rowspan="2">OM1</th><th>50/125 μm</th><th rowspan="2">G.652</th><th rowspan="2">G.652</th></tr><tr><th>800 MHz x km</th></tr><tr><th colspan="2">Typical Distance</th><td>4 km</td><td>5 km</td><td>40 km</td><td>80 km</td></tr><tr><th rowspan="3">Wavelength</th><th>Typical (nm)</th><td colspan="2">1300</td><td>1310</td><td>1550</td></tr><tr><th>TX Range (nm)</th><td colspan="2">1260 to 1360</td><td>1280 to 1340</td><td>1530 to 1570</td></tr><tr><th>RX Range (nm)</th><td colspan="2">1100 to 1600</td><td>1100 to 1600</td><td>1100 to 1600</td></tr><tr><th rowspan="4">Optical Power</th><th>TX Range (dBm)</th><td colspan="2">-10 to -20</td><td>0 to -5</td><td>0 to -5</td></tr><tr><th>RX Range (dBm)</th><td colspan="2">-3 to -32</td><td>-3 to -34</td><td>-3 to -34</td></tr><tr><th>Link Budget (dB)</th><td colspan="2">12</td><td>29</td><td>29</td></tr><tr><th>Dispersion Penalty (dB)</th><td colspan="2">3</td><td>1</td><td>1</td></tr><tr><td colspan="6"><p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p><p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p></td></tr></table> |              |       |                        |                        |  |  | 100BaseFX |  |  | Multi-Mode |  | Single-Mode<br>(40 km) | Single-Mode<br>(80 km) | Fiber Cable Type | OM1 | 50/125 μm | G.652 | G.652 | 800 MHz x km | Typical Distance |  | 4 km | 5 km | 40 km | 80 km | Wavelength | Typical (nm) | 1300 |  | 1310 | 1550 | TX Range (nm) | 1260 to 1360 |  | 1280 to 1340 | 1530 to 1570 | RX Range (nm) | 1100 to 1600 |  | 1100 to 1600 | 1100 to 1600 | Optical Power | TX Range (dBm) | -10 to -20 |  | 0 to -5 | 0 to -5 | RX Range (dBm) | -3 to -32 |  | -3 to -34 | -3 to -34 | Link Budget (dB) | 12 |  | 29 | 29 | Dispersion Penalty (dB) | 3 |  | 1 | 1 | <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 100BaseFX    |       |                        |                        |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Multi-Mode   |       | Single-Mode<br>(40 km) | Single-Mode<br>(80 km) |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
| Fiber Cable Type                                                                                                                                                                                                                                                                                                  | OM1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 50/125 μm    | G.652 | G.652                  |                        |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 800 MHz x km |       |                        |                        |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
| Typical Distance                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 4 km         | 5 km  | 40 km                  | 80 km                  |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
| Wavelength                                                                                                                                                                                                                                                                                                        | Typical (nm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1300         |       | 1310                   | 1550                   |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                   | TX Range (nm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1260 to 1360 |       | 1280 to 1340           | 1530 to 1570           |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                   | RX Range (nm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1100 to 1600 |       | 1100 to 1600           | 1100 to 1600           |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
| Optical Power                                                                                                                                                                                                                                                                                                     | TX Range (dBm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -10 to -20   |       | 0 to -5                | 0 to -5                |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                   | RX Range (dBm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | -3 to -32    |       | -3 to -34              | -3 to -34              |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                   | Link Budget (dB)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 12           |       | 29                     | 29                     |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
|                                                                                                                                                                                                                                                                                                                   | Dispersion Penalty (dB)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3            |       | 1                      | 1                      |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |
| <p>Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.</p> <p>Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) &gt; dispersion penalty (dB) + total link loss (dB).</p> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |       |                        |                        |  |  |           |  |  |            |  |                        |                        |                  |     |           |       |       |              |                  |  |      |      |       |       |            |              |      |  |      |      |               |              |  |              |              |               |              |  |              |              |               |                |            |  |         |         |                |           |  |           |           |                  |    |  |    |    |                         |   |  |   |   |                                                                                                                                                                                                                                                                                                                   |  |  |  |  |  |

#### DIP Switch Configuration

|                    |                                                                        |
|--------------------|------------------------------------------------------------------------|
| Ethernet Interface | Quality of Service (QoS), Broadcast storm protection, Port break alarm |
|--------------------|------------------------------------------------------------------------|

#### Input/Output Interface

|                        |                                                             |
|------------------------|-------------------------------------------------------------|
| Alarm Contact Channels | Relay output with current carrying capacity of 1 A @ 24 VDC |
|------------------------|-------------------------------------------------------------|

#### Switch Properties

|                    |                   |
|--------------------|-------------------|
| MAC Table Size     | 8 K               |
| Packet Buffer Size | 2 Mbits           |
| Processing Type    | Store and Forward |

#### Power Parameters

|                   |                                                                                                                                                    |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Connection        | 1 removable 6-contact terminal block(s)                                                                                                            |
| Input Current     | EDS-2016-ML: 0.088 A @ 24 VDC<br>EDS-2016-ML-MM-SC: 0.149 A @ 24 VDC<br>EDS-2016-ML-MM-ST: 0.152 A @ 24 VDC<br>EDS-2016-ML-SS-SC: 0.163 A @ 24 VDC |
| Input Voltage     | 12/24/48 VDC, Redundant dual inputs                                                                                                                |
| Operating Voltage | 9.6 to 60 VDC                                                                                                                                      |

|                                        |                                                                                                                                                                                                                                            |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Overload Current Protection            | Supported                                                                                                                                                                                                                                  |
| Reverse Polarity Protection            | Supported                                                                                                                                                                                                                                  |
| <b>Physical Characteristics</b>        |                                                                                                                                                                                                                                            |
| Housing                                | Metal                                                                                                                                                                                                                                      |
| IP Rating                              | IP30                                                                                                                                                                                                                                       |
| Dimensions                             | EDS-2016-ML: 36 x 135 x 95 mm (1.41 x 5.31 x 3.74 in)<br>EDS-2016-ML-MM-SC: 58 x 135 x 95 mm (2.28 x 5.31 x 3.74 in)                                                                                                                       |
| Weight                                 | Non-fiber models: 486 g (1.07 lb)<br>Fiber models: 648 g (1.43 lb)                                                                                                                                                                         |
| Installation                           | DIN-rail mounting, Wall mounting (with optional kit)                                                                                                                                                                                       |
| <b>Environmental Limits</b>            |                                                                                                                                                                                                                                            |
| Operating Temperature                  | EDS-2016-ML: -10 to 60°C (14 to 140°F)<br>EDS-2016-ML-T: -40 to 75°C (-40 to 167°F)                                                                                                                                                        |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)                                                                                                                                                                                                                 |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)                                                                                                                                                                                                                  |
| <b>Standards and Certifications</b>    |                                                                                                                                                                                                                                            |
| Safety                                 | UL 61010-2-201, EN 62368-1 (LVD)                                                                                                                                                                                                           |
| EMC                                    | EN 55032/35                                                                                                                                                                                                                                |
| EMI                                    | CISPR 32, FCC Part 15B Class A                                                                                                                                                                                                             |
| EMS                                    | IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV<br>IEC 61000-4-3 RS: 80 MHz to 1 MHz: 20 V/m<br>IEC 61000-4-4 EFT: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV<br>IEC 61000-4-6 CS: 10 V<br>IEC 61000-4-8 PFMF |
| Hazardous Locations                    | Class I Division 2, ATEX, IECEx                                                                                                                                                                                                            |
| Railway                                | EN 50121-4                                                                                                                                                                                                                                 |
| Vibration                              | IEC 60068-2-6                                                                                                                                                                                                                              |
| Shock                                  | IEC 60068-2-27                                                                                                                                                                                                                             |
| Freefall                               | IEC 60068-2-32                                                                                                                                                                                                                             |
| <b>MTBF</b>                            |                                                                                                                                                                                                                                            |
| Time                                   | 2,070,826 hrs                                                                                                                                                                                                                              |
| Standards                              | Telcordia (Bellcore), GB                                                                                                                                                                                                                   |
| <b>Warranty</b>                        |                                                                                                                                                                                                                                            |
| Warranty Period                        | 5 years                                                                                                                                                                                                                                    |
| Details                                | See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>                                                                                                                                                                       |


## Package Contents

|                  |                                                   |
|------------------|---------------------------------------------------|
| Device           | 1 x EDS-2016-ML Series switch                     |
| Installation Kit | 4 x cap, plastic, for RJ45 port                   |
| Documentation    | 1 x quick installation guide<br>1 x warranty card |

## Dimensions


### EDS-2016-ML Copper Series

Unit: mm (inch)

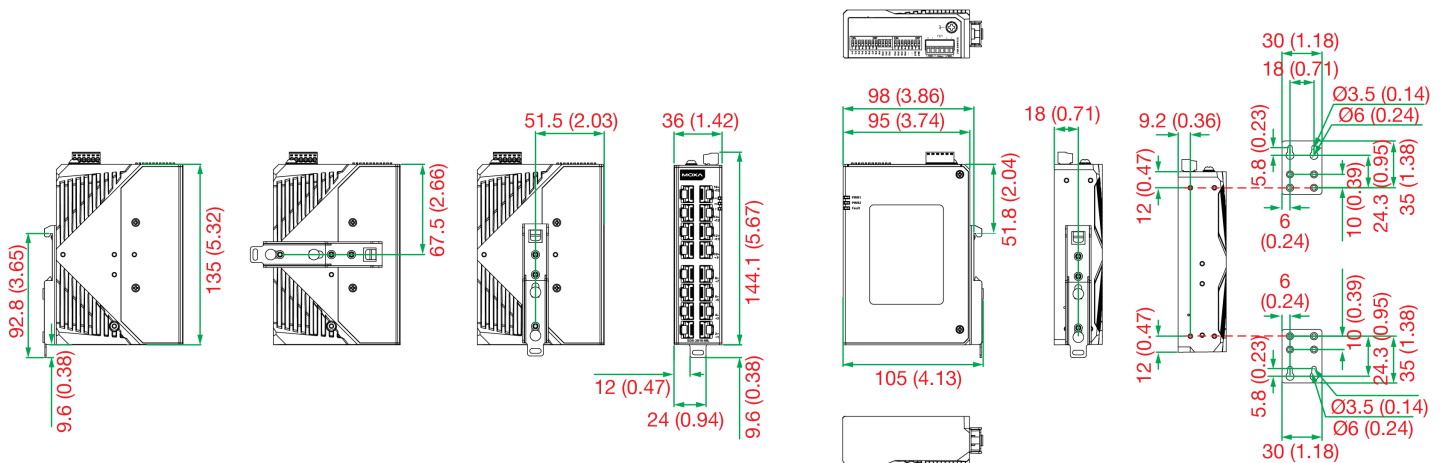

### EDS-2016-ML Fiber Series

Unit: mm (inch)

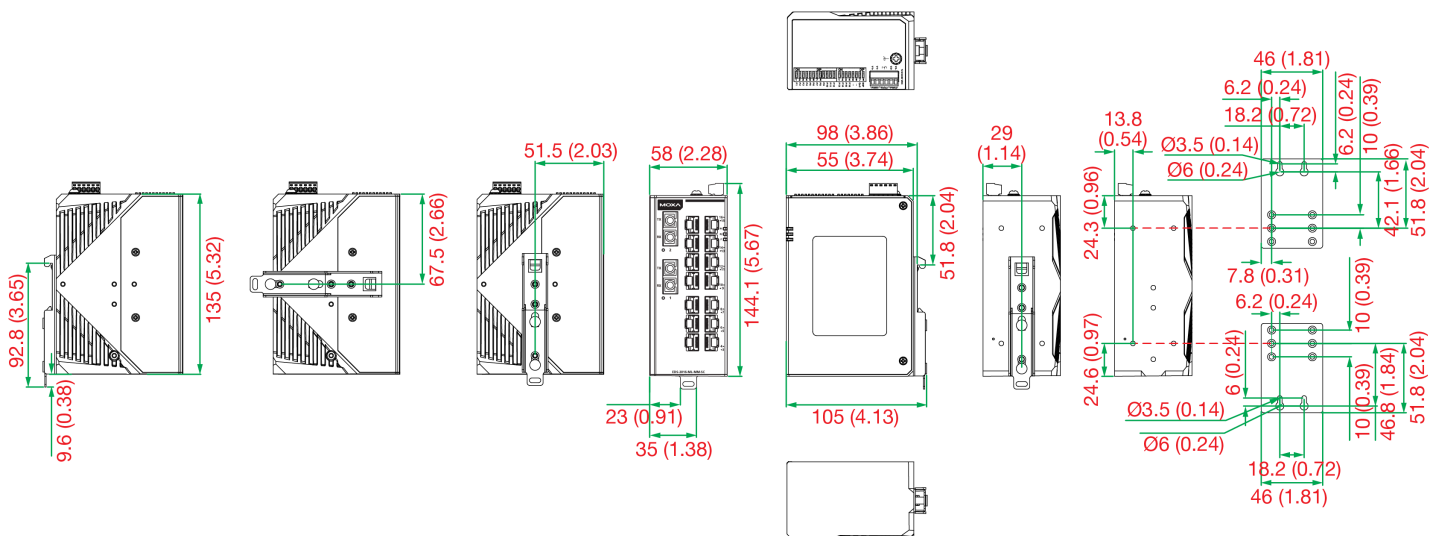

## Ordering Information

| Model Name          | 10/100BaseT(X) Ports, RJ45 Connector | 100BaseFX Ports Multi-mode, SC Connector | 100BaseFX Ports Multi-mode, ST Connector | 100BaseFX Ports Single-mode, SC Connector | Operating Temp. |
|---------------------|--------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|-----------------|
| EDS-2016-ML         | 16                                   | -                                        | -                                        | -                                         | -10 to 60°C     |
| EDS-2016-ML-T       | 16                                   | -                                        | -                                        | -                                         | -40 to 75°C     |
| EDS-2016-ML-MM-SC   | 14                                   | 2                                        | -                                        | -                                         | -10 to 60°C     |
| EDS-2016-ML-MM-SC-T | 14                                   | 2                                        | -                                        | -                                         | -40 to 75°C     |
| EDS-2016-ML-MM-ST   | 14                                   | -                                        | 2                                        | -                                         | -10 to 60°C     |

| Model Name          | 10/100BaseT(X) Ports,<br>RJ45 Connector | 100BaseFX Ports<br>Multi-mode, SC<br>Connector | 100BaseFX Ports<br>Multi-mode, ST<br>Connector | 100BaseFX Ports<br>Single-mode, SC<br>Connector | Operating Temp. |
|---------------------|-----------------------------------------|------------------------------------------------|------------------------------------------------|-------------------------------------------------|-----------------|
| EDS-2016-ML-MM-ST-T | 14                                      | –                                              | 2                                              | –                                               | -40 to 75°C     |
| EDS-2016-ML-SS-SC   | 14                                      | –                                              | –                                              | 2                                               | -10 to 60°C     |
| EDS-2016-ML-SS-SC-T | 14                                      | –                                              | –                                              | 2                                               | -40 to 75°C     |

## Accessories (sold separately)

### Power Supplies

|           |                                                                                                                                                                   |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DR-120-24 | 120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature |
| DR-4524   | 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50°C operating temperature                                       |
| DR-75-24  | 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature                                     |
| MDR-40-24 | DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                                             |
| MDR-60-24 | DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature                                             |

### Wall-Mounting Kits

|          |                                                                                                                                                                                                                       |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WK-30-02 | Wall-mounting kit, 2 plates, 4 screws, 30 x 66.8 x 2 mm<br><br>Applicable Models:<br>EDS-2016-ML<br>EDS-2016-ML-T                                                                                                     |
| WK-46-01 | Wall-mounting kit, 2 plates, 8 screws, 46 x 66.8 x 2 mm<br><br>Applicable Models:<br>EDS-2016-ML-MM-SC<br>EDS-2016-ML-MM-SC-T<br>EDS-2016-ML-MM-ST<br>EDS-2016-ML-MM-ST-T<br>EDS-2016-ML-SS-SC<br>EDS-2016-ML-SS-SC-T |

### Rack-Mounting Kits

|       |                           |
|-------|---------------------------|
| RK-4U | 19-inch rack-mounting kit |
|-------|---------------------------|

© Moxa Inc. All rights reserved. Updated Jul 17, 2021.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.