

2-port CAN interface PCI Express boards with 2 kV isolation



- Features and Benefits
- Supports CAN 2.0A and CAN 2.0B
 - Two independent CAN communication ports
 - CAN transfer rate up to 1 Mbps
 - 2 kV electrical isolation
 - LED for transmit/receive status on each port
 - Optional 120-ohm terminal resistor for CAN bus network
 - DLL library and examples included
 - Windows driver provided

Certifications



Introduction

Moxa’sCP-602E-I CAN (Controller Area Network) interface board supports the PCI Express interface. As a standalone CAN controller, the CP-602E-I is a cost-effective solution that provides two active CAN controllers with a DB9 connector on the same board. The CP-602E-I CAN interface board uses the NXP SJA1000 and transceiver PCA82C251, which provide bus arbitration and error detection. The -40 to 85°C wide operating temperature (CP-602E-I-T only) and 2 kV isolation make the boards suitable for use in harsh industrial environments.

Specifications

CAN Interface	
Baudrate	10/20/50/125/250/500/800/1000 kbps, user-defined
Connector	DB9 male
No. of Ports	2
Environmental Limits	
Operating Temperature	Standard Models: 0 to 55°C (32 to 131°F) Wide Temp. Models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11

Declaration

Green Product

RoHS, CRoHS, WEEE

MTBF

Time

4,645,502 hrs

Standards

Telcordia SR332

Warranty

Warranty Period

5 years

Details

See www.moxa.com/warranty

Package Contents

Device


1 x CP-602E-I Series serial board

Documentation

1 x quick installation guide
1 x substance disclosure table
1 x warranty card

Dimensions

Unit: mm (inch)

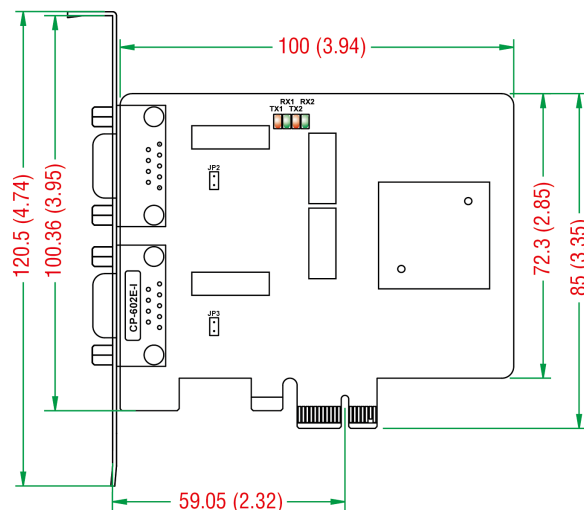

Ordering Information

Model Name	Serial Bus	CAN Specification	No. of Serial Ports	Serial Isolation Protection	Operating Temp.
CP-602E-I w/o Cable	PCI Express	CAN 2.0 A/B	2	2 kV	0 to 55°C
CP-602E-I-T w/o Cable	PCI Express	CAN 2.0 A/B	2	2 kV	-40 to 85°C

Accessories (sold separately)

Connectors

Mini DB9F-to-TB

DB9 female to terminal block connector

Cables

CBL-F9M9-150

DB9 female to DB9 male serial cable, 1.5 m

CBL-F9M9-20

DB9 female to DB9 male serial cable, 20 cm

© Moxa Inc. All rights reserved. Updated Sep 24, 2021.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.